



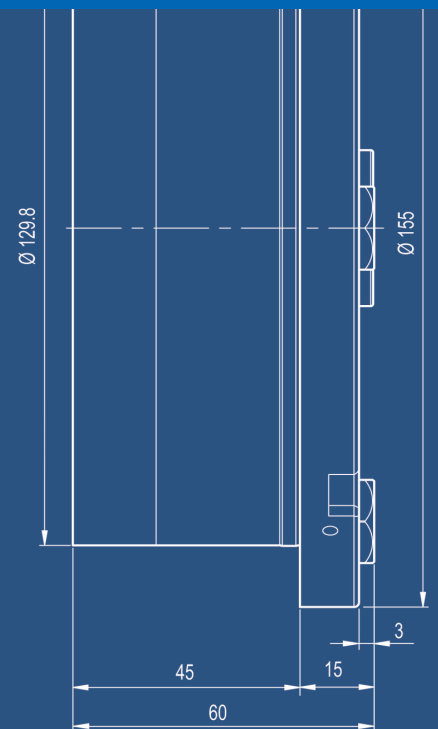

STARK

...the pneumatic quick clamping device for selected applications

Compact size for even tighter gauges

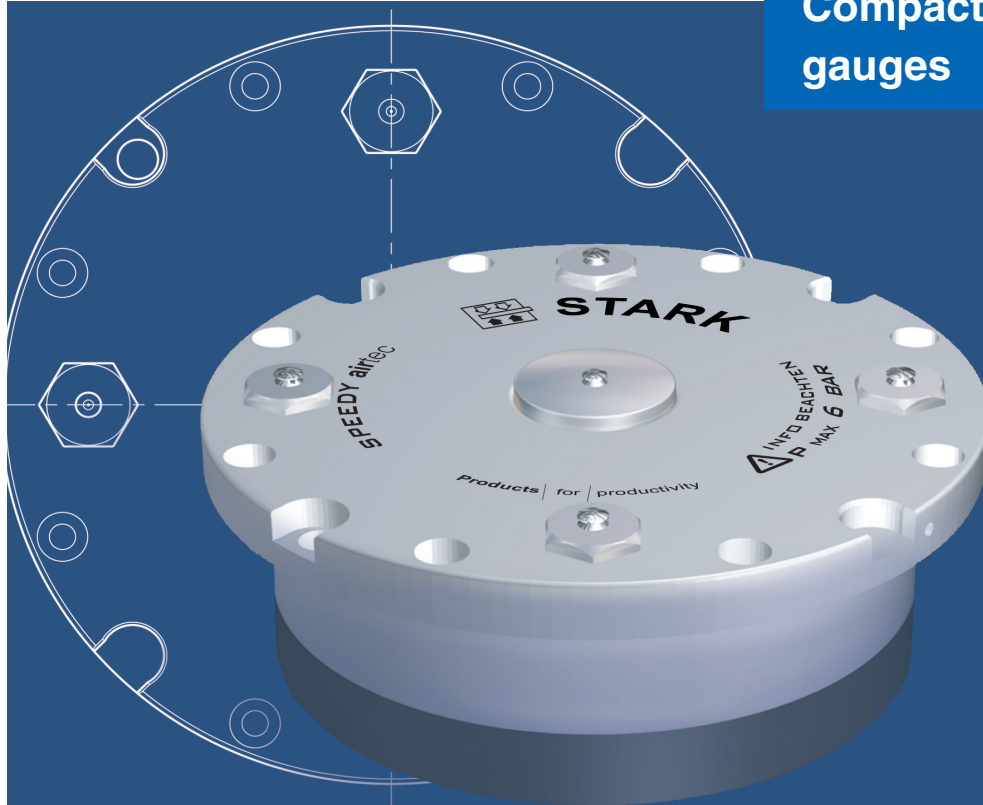

SPEEDY airtec

Zero point mounting system

SPEEDY airtec – three compact sizes with the same holding force



SPEEDY airtec - locks mechanically, releases pneumatically

Wide range of applications

The **SPEEDY airtec** is well suited for all areas of application that require oil-free mounting systems, e.g. in food processing and for processes under special hygienic conditions.

All **SPEEDY airtec** quick clamping devices operate with only one mounting nipple for all sizes. This assures interchangeability among the various sizes.

SPEEDY airtec is also available in 4 variations. Besides the standard version with support ring, a version with central locking can be selected. Index bores for the locking pistons and mounts with integrated blow off extend the area of application.

SPEEDY airtec is a pneumatic quick clamping device, actuated via compressed air connection with < 6 bar, without pressure converter or ancillary equipment.

Three compact sizes enable even tighter gauges with a holding force of 20 kN.

- Easy actuation via compressed air connection
- High holding forces and optimized power flow
- Process repeatability - holds even after pressure drops off
- Application in all milling operation and in the food and pharma industries (oil free)
- Optional locking piston with index bores
- Modular structure



SPEEDY airtec, size Ø 80 mm



SPEEDY airtec, size Ø 105 mm



SPEEDY airtec, size Ø 155 mm, with central locking, mounts and index bores