

# Positioning feet





**Material:**  
Free-cutting steel.

**Surface finish:**  
Case-hardened with black oxide finish.

**Sample order:**  
nlm 02040-215

**Note:**  
Positioning feet are used as supports, stops and plungers for jigs and fixtures, as well as in general machine and appliance construction.

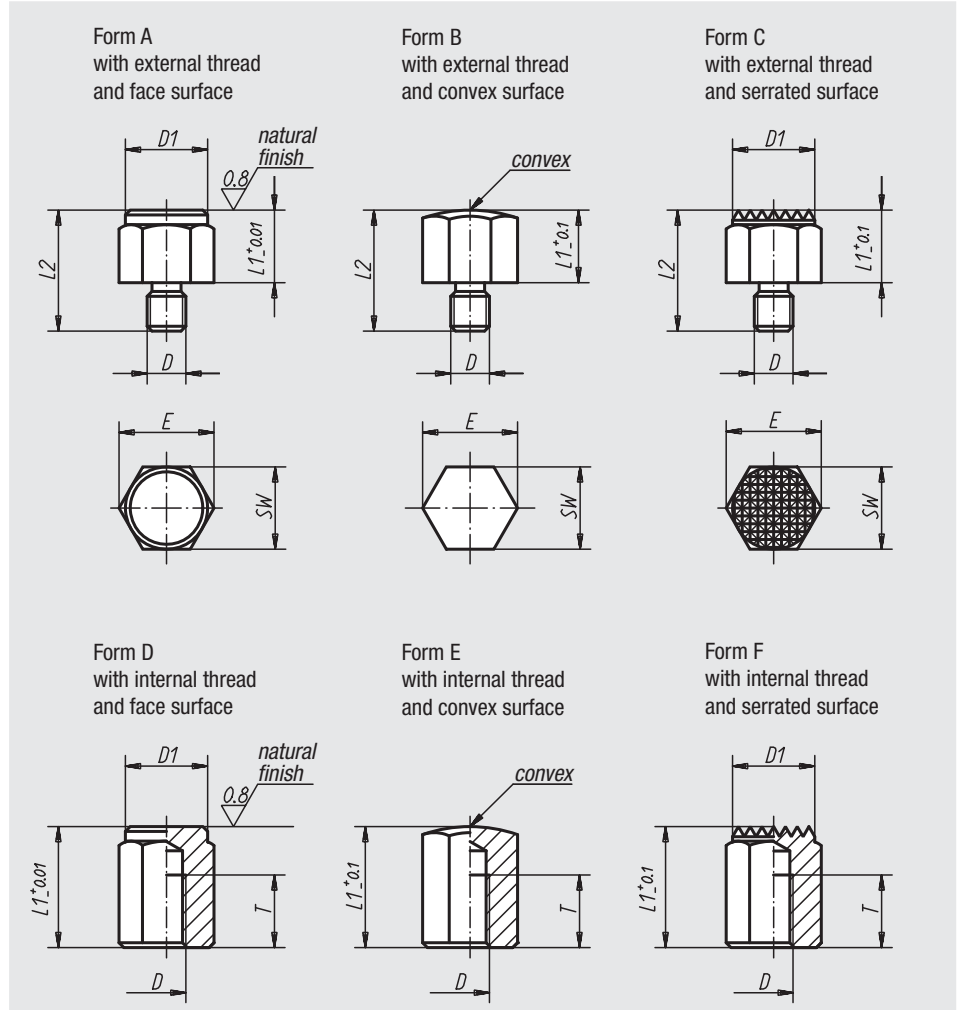

Order No. Form A	Order No. Form B	Order No. Form C	D	L1	D1	L2	E	SW	Tightening torque max. Nm	Approx. weight kg
02040-1101	02040-2101	02040-3101	M8	10	17	20	19,4	17	18	0,024
02040-110	02040-210	02040-310	M12	10	22	24	25,2	22	60	0,040
02040-115	02040-215	02040-315	M12	15	22	29	25,2	22	60	0,056
02040-1151	02040-2151	02040-3151	M16	15	30	34	33	30	140	0,130
02040-1201	02040-2201	02040-3201	M16	20	30	39	33	30	140	0,155

Order No. Form D	Order No. Form E	Order No. Form F	D	L1	D1	T	E	SW	Approx. weight kg
02040-415	02040-515	02040-615	M8	15	17	6	19,4	17	0,023
02040-4251	02040-5251	02040-6251	M8	25	17	16	19,4	17	0,040
02040-420	02040-520	02040-620	M12	20	22	10	25,2	22	0,052
02040-425	02040-525	02040-625	M12	25	22	15	25,2	22	0,065
02040-430	02040-530	02040-630	M12	30	22	20	25,2	22	0,077
02040-440	02040-540	02040-640	M12	40	22	25	25,2	22	0,105
02040-450	02040-550	02040-650	M12	50	22	25	25,2	22	0,135
02040-4301	02040-5301	02040-6301	M16	30	30	20	33	30	0,140
02040-4501	02040-5501	02040-6501	M16	50	30	25	33	30	0,250

01000  
02000  
03000  
04000  
05000  
06000  
07000  
08000  
09000  
20000  
21000  
22000  
23000