

## Spring plungers

with hexagon socket and pressure pin, long version



**Material:**

Sleeve in steel quality class 5.8.  
Pressure pin in steel.  
Spring in spring steel D.

**Surface finish:**


Black oxide finish.  
Pressure pin hardened.

**Sample order:**


nIm 03040-616

**Note:**


These spring plungers are chiefly used as ejectors and spring stops in machine construction.

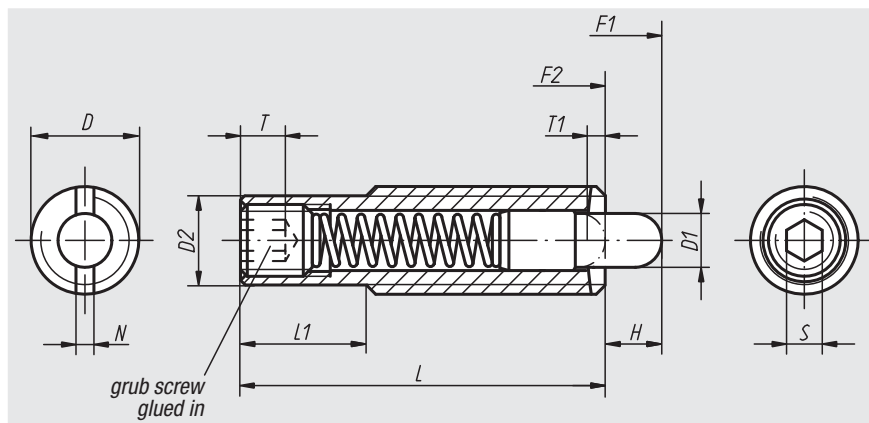



bending the shank



assembly key



press



Order No.	D	D1	D2	L	L1	H	T	T1	N	S	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N	Order No. assembly key
03040-608	M8	3,5	6,2	30	10	6	2	1,4	1,2	2,5	8	22	03040-908
03040-610	M10	4	8	40	10	8	3	1,4	1,6	3	12	30	03040-910
03040-612	M12	6	9,6	50	20	10	5	2	2	4	20	50	03040-912
03040-616	M16	7,5	13,4	60	30	12	6	2,5	2,5	5	30	64	03040-916