

# Safety tension levers

with external thread



### Material:

Steel parts quality class 5.8,  
black plastic ball knob

### Surface finish:

Plastic-coated with fine texture, black

### Sample order:

nIm 06383-1108X30 (please also indicate dimension L)

### Note:


Missing dimensions see safety tension levers with internal thread.

### Method of operation:


To operate safety tension levers, press the handle down until the teeth are fully engaged. The object concerned can now be clamped or released. Spring pressure releases the locking mechanism immediately, thereby restoring the safety function (handle can be turned effortlessly).

### On request:

Other external threads, screw lengths and special versions.  
Dimensions „H1“ and „A“ available in other lengths at extra charge.

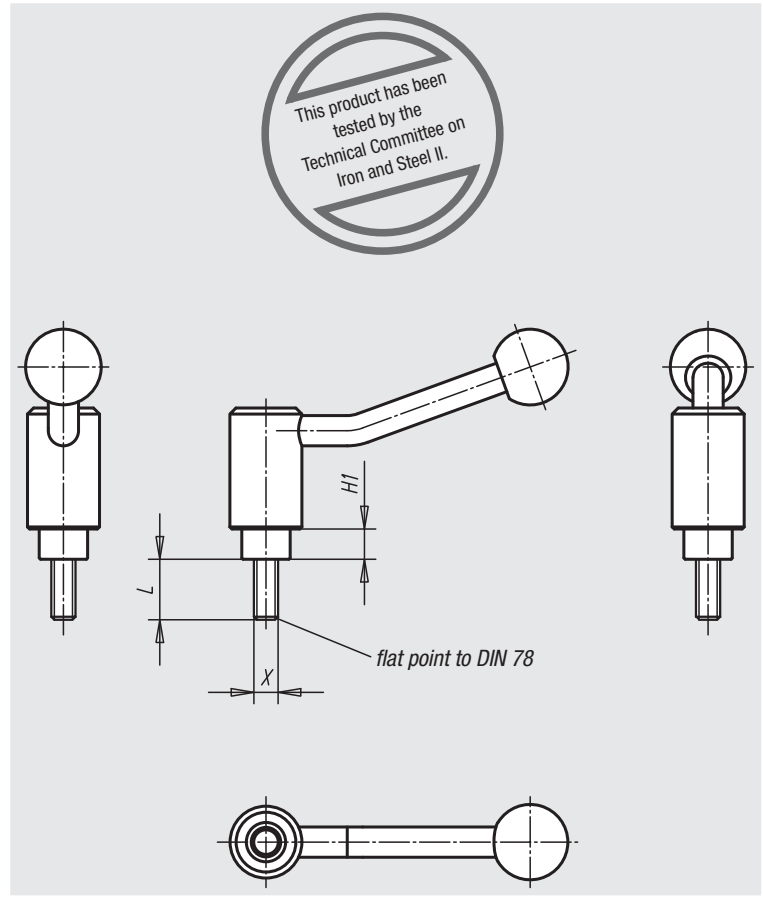

engage  
by pressing  
(safety function)



Order No.	External thread X	Size	H1	L = screw length
06383-1108X	M8	1	9,5	20/25/30/40/50/60
06383-1110X	M10	1	9,5	20/25/30/40/50/60
06383-1112X	M12	1	9,5	20/25/30/40/50/60
06383-1212X	M12	2	10,5	20/25/30/40/50/60
06383-1312X	M12	3	12,5	25/30/40/50/60
06383-1316X	M16	3	12,5	25/30/40/50/60