

# Tray handles



**Material:**

Tray handle in aluminium profile, end caps polyamide;  
 form A: mounting by rubber insert  
 form B: mounting by 2 countersunk screws, steel

**Surface finish:**

Tray handle glass-ball blasted, satin finish and black anodized or natural colour anodized; rubber insert black; fastening screws galvanized

**Sample order:**

nlm 06960-10011


**Note:**

The tray handles form A can be used without screw mounting with sheet strengths of 1-2.5 mm. Two rubber inserts ensure absolutely firm mounting.  
 The tray handles form B can be mounted from outside with 2 countersunk screws.

Two cross-slots offset by 90° for M4 screws allow earth/ground connection and can serve as a mounting aid for additional add-on parts.

**Assembly:**

After fitting the lower rubber insert, press the two side caps onto the tray handle. Next press the handle over the lower edge of the mounting cutout at a 45° angle and then hold it against the housing panel.  
 Now push the 2nd rubber insert into the upper groove or mount it with 2 countersunk screws.

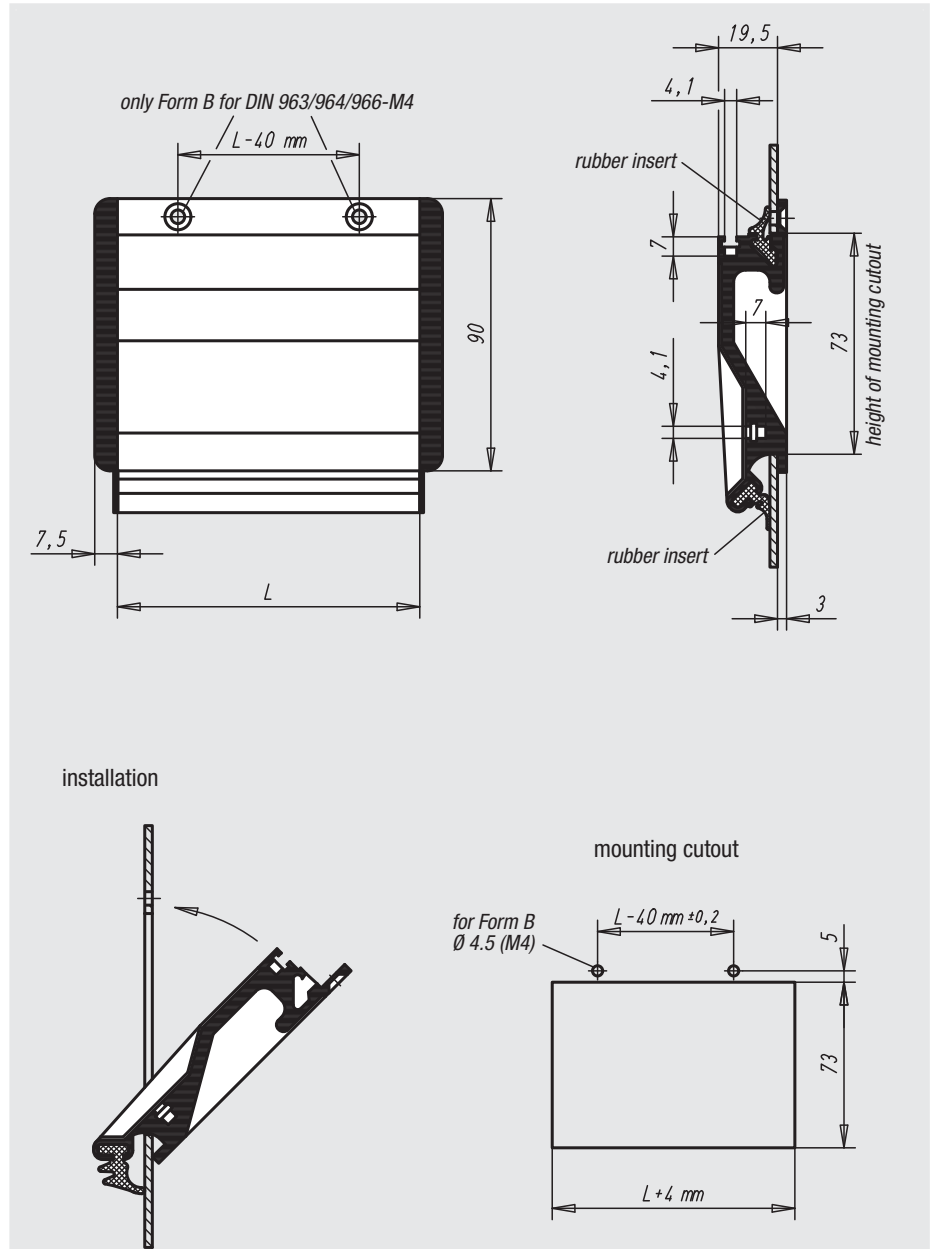

Order No. tray handle black anodized	Order No. tray handle natural colour anodized	Form	L	Mounting cutout	Load bearing capacity N	Approx. weight kg
06960-10011	06960-10013	A	100	104 x 73	500	0,107
06960-11811	06960-11813	A	118	122 x 73	500	0,126
06960-16711	06960-16713	A	167	171 x 73	500	0,178
06960-10021	06960-10023	B	100	104 x 73	500	0,107
06960-11821	06960-11823	B	118	122 x 73	500	0,126
06960-16721	06960-16723	B	167	171 x 73	500	0,178