

Rotary module, pneumatic



Material:
Housing in high-strength aluminium;
stop system steel

Surface finish:
Housing anodized; stop system hardened



Sample order:
nlm 20060-014

Note:
Maintenance-free pneumatic rotary module for small installation spaces with dual pressurised drive cylinder. Control by 4/2 or 5/2 directional valve. Drive ensues via compressed air, 4-8 bar, constant, filtered (10 µm), dried, oiled or unoiled. Compressed air connection M5.
Modules of the same size can be combined with one another without adapter plates via the precise centring system by means of centring rings 20240.

The 0° – 190° rotation angle is continuously adjustable.

Repeat accuracy ±0.01°.

Accessory:
Shock absorber. Proximity switch. Plug connector.

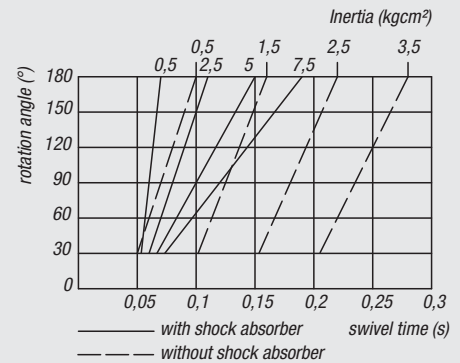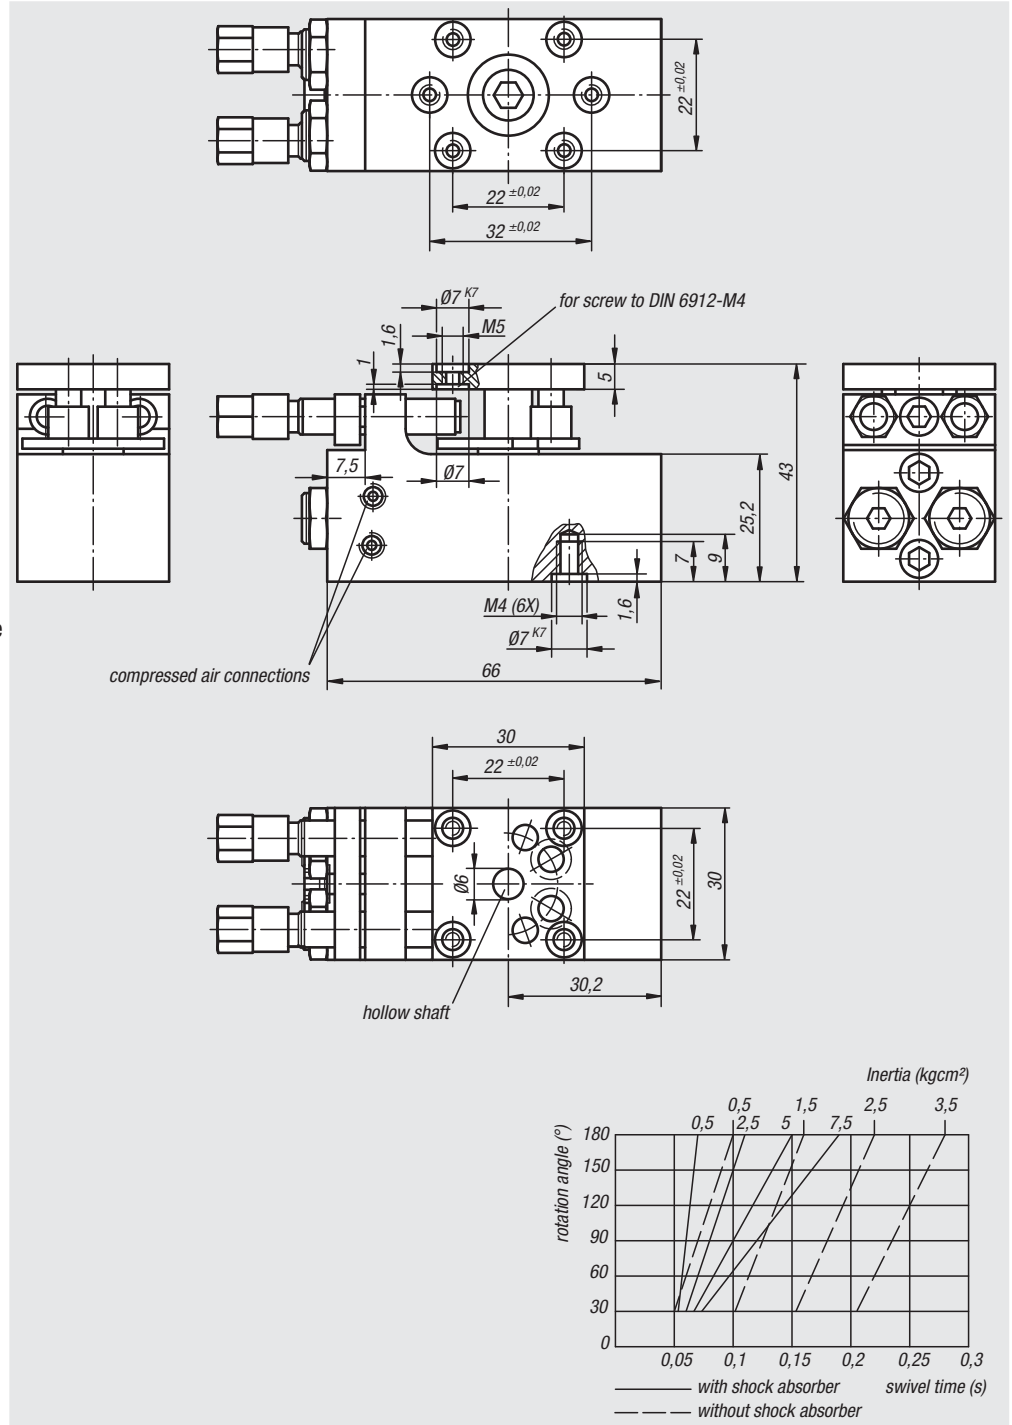

Order No.	Size	Driving torque Nm	Rotation angle	Axial load N	Radial load N	Cylinder-Ø	Air consumption per cycle at 6 bar (ccm)	Approx. weight kg
20060-014	4	0,28	0° - 190°	300	220	2 x 10	5	0,240

Order No.	Size	Suitable shock absorber	Suitable proximity switch	Suitable plug connector
20060-014	4	26300-1010008	20915-010	20960-010X2000

01000
02000
03000
04000
05000
06000
07000
08000
09000
20000
21000
22000
23000