


Cardan single joints with slide bearing

DIN 808

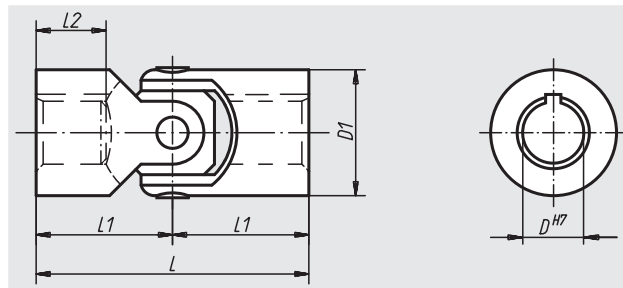

Material:

Steel

Surface finish:

Joint and slide bearing hardened

Sample order:

nIm 23403-06034

Note:


Cardan joints with slide bearing can be swivelled by 45°.

Max. transferable torque (Nm) at 150 r.p.m.;
operation angle $\alpha < 5^\circ$.


* Bore hole depth is smaller than DIN 808.

On request:


square



feather slot to DIN 6885-1



hexagon



Order No. Locating hole without slot	Order No. Locating hole with slot	D	D1	L	L1	L2	B	T	Max. torque Nm	static fracture torque in Nm	Approx. weight kg
23403-06034	-	6	16	34	17	9*	2	7	7	40	0,035
23403-08040	23403-108040	8	16	40	20	11*	2	9	7	40	0,040
23403-10048	23403-110048	10	20	48	24	12*	3	11,4	16	90	0,075
23403-12056	23403-112056	12	25	56	28	14*	4	13,8	26	150	0,140
23403-16068	23403-116068	16	32	68	34	16*	5	18,3	52	300	0,290
23403-20082	23403-120082	20	40	82	41	20*	6	22,8	100	650	0,530
23403-25104	23403-125104	25	50	104	52	25*	8	28,3	210	1200	1,140

01000
02000
03000
04000
05000
06000
07000
08000
09000
20000
21000
22000
23000