


ACME threaded spindles, rolled

right-hand thread, single-flight

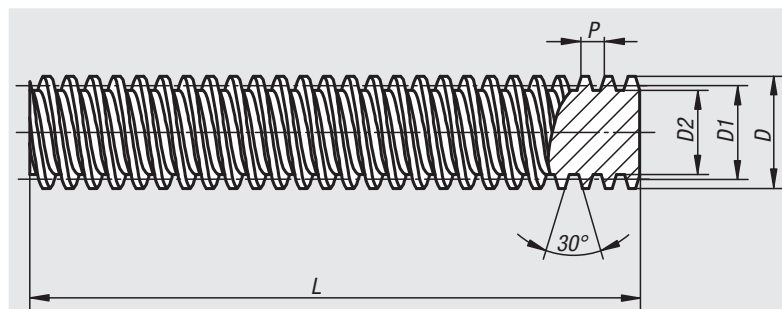

Material:

Hardened steel 1.0401 (C15).

Surface finish:

Rolled, natural finish

Sample order:

nIm 24000-100311X1000

Note:

The ACME threaded spindle is a movement spindle that has a relatively large friction. It is self locking in the standard thread range. This has the advantage that it generally need not be secured in the rest position

DIN 103. Pitch Tr 10x3 not acc. to DIN 103

Tolerance class 7e

Pitch precision 0.3 / 300 mm

On request:

Lengths up to a max. 3000 mm.

| Order No. | DxP | D1 min. | D1 max. | D2 | L | Approx. weight kg/m |
|-------------------|---------|---------|---------|------|------|---------------------|
| 24000-100311X1000 | Tr 10x3 | 8,191 | 8,415 | 5,84 | 1000 | 0,430 |
| 24000-120311X1000 | Tr 12x3 | 10,191 | 10,415 | 7,84 | 1000 | 0,660 |
| 24000-160411X1000 | Tr 16x4 | 13,64 | 13,905 | 10,8 | 1000 | 1,180 |
| 24000-200411X1000 | Tr 20x4 | 17,64 | 17,905 | 14,8 | 1000 | 1,960 |
| 24000-240511X1000 | Tr 24x5 | 21,094 | 21,394 | 17,5 | 1000 | 2,800 |
| 24000-260511X1000 | Tr 26x5 | 23,094 | 23,394 | 19,5 | 1000 | 3,340 |
| 24000-300611X1000 | Tr 30x6 | 26,547 | 26,882 | 21,9 | 1000 | 4,440 |