

## Locating feet


**Material:**



Hardened steel 1.0301.

**Surface finish:**

Case-hardened with black oxide finish.

**Sample order:**

nlm 02090-08

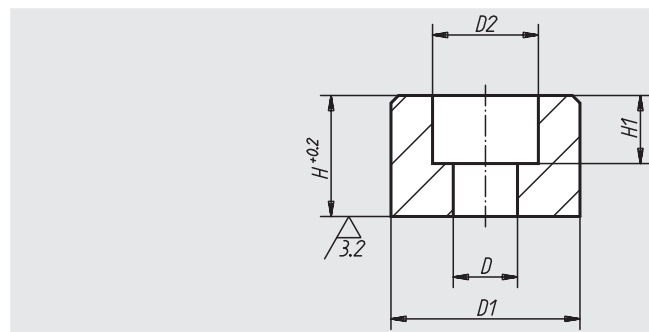

| Order No. | D    | D1 | D2 | H  | H1  | Approx. weight kg |
|-----------|------|----|----|----|-----|-------------------|
| 02090-05  | 5,5  | 16 | 10 | 10 | 5,7 | 0,012             |
| 02090-06  | 6,6  | 20 | 11 | 12 | 7   | 0,023             |
| 02090-08  | 9    | 25 | 15 | 16 | 9   | 0,048             |
| 02090-10  | 11   | 32 | 18 | 20 | 11  | 0,100             |
| 02090-12  | 13,5 | 36 | 20 | 25 | 13  | 0,156             |

## Swivel pads


**Material:**



Ball element in case-hardened free-cutting steel.  
Pressure pad in free-cutting steel ETG 100.

**Surface finish:**

Black oxide finish.

**Sample order:**

nlm 02110-10

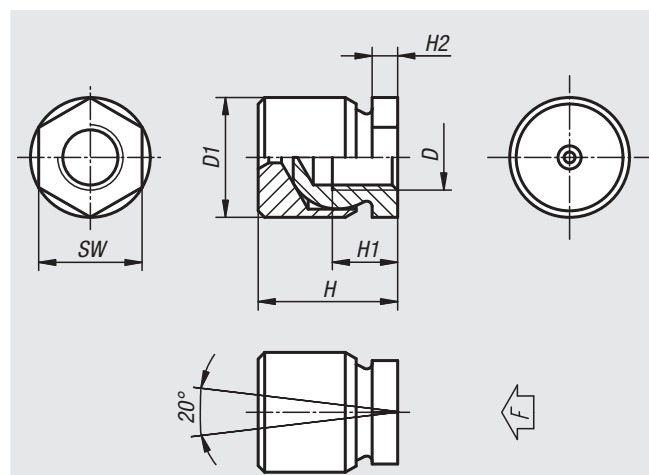

| Order No. | D   | D1 | H    | H1  | H2  | SW | F max. N | Approx. weight kg |
|-----------|-----|----|------|-----|-----|----|----------|-------------------|
| 02110-05  | M5  | 13 | 16,5 | 6,5 | 4   | 10 | 1620     | 0,012             |
| 02110-06  | M6  | 13 | 16,5 | 8,5 | 4   | 10 | 2330     | 0,011             |
| 02110-08  | M8  | 16 | 21   | 9   | 4   | 13 | 4150     | 0,023             |
| 02110-10  | M10 | 19 | 23   | 10  | 4   | 17 | 6480     | 0,035             |
| 02110-12  | M12 | 22 | 25,5 | 12  | 4,7 | 19 | 8320     | 0,052             |
| 02110-16  | M16 | 25 | 29,5 | 14  | 5   | 24 | 13940    | 0,074             |
| 02110-20  | M20 | 32 | 36   | 18  | 8,5 | 30 | 21000    | 0,138             |