

Slot nuts with elastic stop ring


Material:

Free-cutting steel; circlips: polyamid (max. 100 °C)

Surface finish:

Galvanized

Sample order:


nIm 07595-24

Note:

The use of slot nuts with elastic stop rings has enormous cost advantages, in as much as securing plates and therefore also expensive milling work for a wedged slot are omitted.

The polyamide ring is resistant to petrol and oil.

Slot nuts with elastic stop rings can be used several times. They withstand the strongest vibrations and oscillations irrespective of the torque and are therefore usable as adjusting nuts.

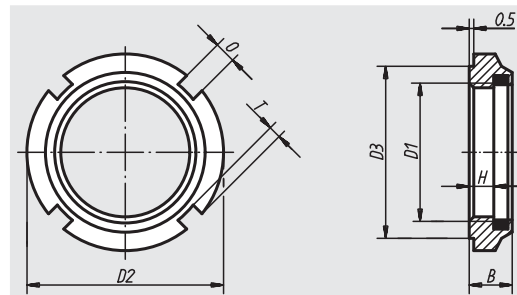

Order No.	D1	D2	D3	H	B	T	0	Approx. weight kg
07595-10	M10x1	18	15	4,4	7,6	1,5	3	0,015
07595-12	M12x1,5	21	18	5,7	9,2	1,5	3	0,020
07595-14	M14x1,5	24	21	6	10,7	1,5	4	0,025
07595-16	M16x1,5	28	24	6	10,7	2	4	0,028
07595-18	M18x1,5	28	24	7,3	10,7	2	4	0,030
07595-20	M20x1,5	32	27	6	9,6	2,5	4	0,035
07595-22	M22x1,5	38	33	7	12,7	2,5	5	0,038
07595-24	M24x1,5	38	33	6,2	10,7	2,5	5	0,045
07595-28	M28x1,5	44	38	6,9	11,2	3	5	0,055
07595-30	M30x1,5	44	38	6,5	11	3	5	0,053
07595-32	M32x1,5	50	44	6,6	11,2	3	5	0,065
07595-35	M35x1,5	50	44	7	11	3	5	0,062
07595-38	M38x1,5	53	47	6,6	12,2	3	5	0,075
07595-40	M40x1,5	56	50	7	12	3	6	0,082
07595-42	M42x1,5	62	55	10,6	15,2	3,5	6	0,085