

Press-in plugs

with dipstick



Material, surface finish:

Housing in black thermoplastic polyamide 66;
 cap in red thermoplastic polyamide 66;
 air filter in polyurethane (PU foam), filter
 fineness 50 µm;
 dipstick in phosphated zinc;
 O-ring in rubber (NBR)

Sample order:


nIm 28048-13018

Note:

Temperature resistant with oil up to 100 °C,
 with water up to 70 °C.

On request:

Min-Max mark notches and other dipstick
 lengths.

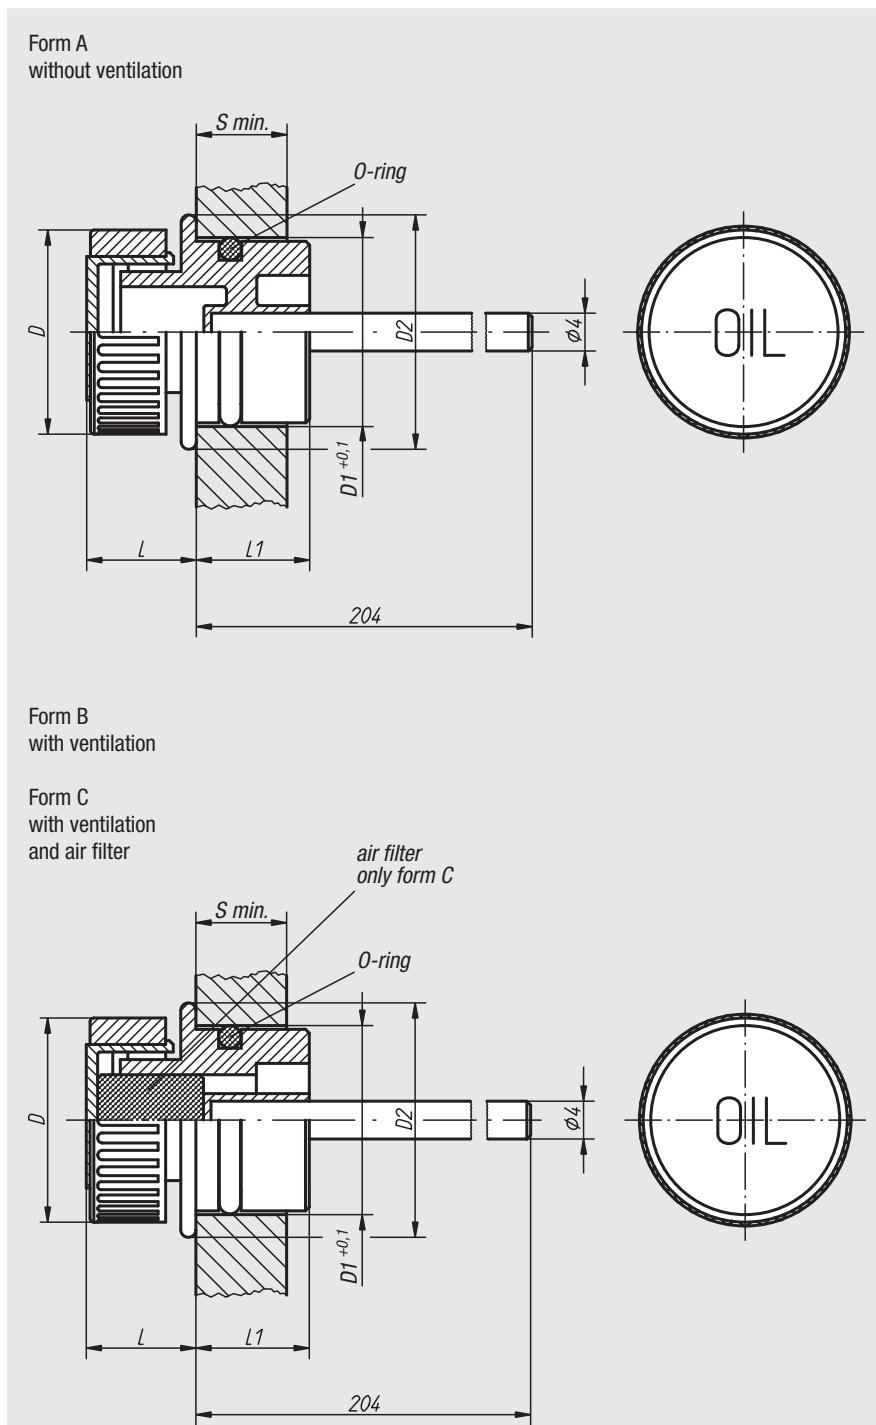

Order No. Form A	Order No. Form B	Order No. Form C	D	drill-Ø D1	D2	L	L1	S min.	Approx. weight kg
28048-13018	28048-23018	28048-33018	30	18	23	14	14	8	0,028