

## Magnetic tripod

**Surface finish:**


Magnetic foot: shielded system, surface galvanized

**Sample order:**

nIm 31125-01

**Note:**

Adhesive force 450 N. Application temperature up to 100 °C. Hairline cracks in the built-in magnetic material are unavoidable for technical reasons. They do not impair the function of the adhesive magnets in any way. (see also 09065-10).

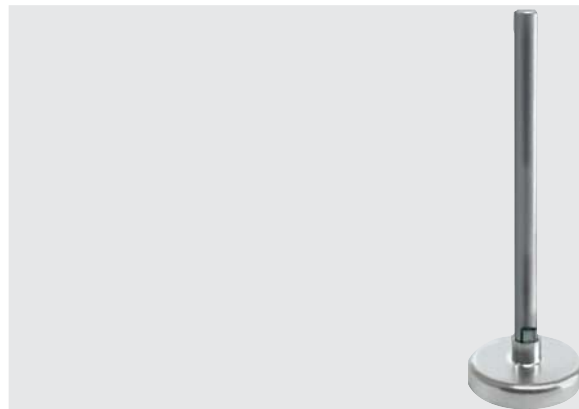

Order No.	total height	Column height	Ø column	Magnetic foot: Ø	Magnetic foot: Height of base	Magnetic foot: Overall height	Fixation thread	Approx. weight kg
31125-01	284	250	16	80	18	34	M10	0,875

## Transverse holder

**Sample order:**

nIm 31130-01

**Note:**

Adjusting by means of fine-adjustment.



Order No.	total length	Ø of column or bar	Fixation holes, e.g. for dial gauge	Approx. weight kg
31130-01	270	16	3 x Ø 8	0,410