

Standard solid rubber tyres

on pressed steel rim


Material:

Rim in sheet steel; wheel standard solid rubber tyre

Surface finish:

Rim galvanized and chromated; black tyre

Sample order:


nIm 95050-14038

Note:

This special rim design is extremely strong, even under extreme shock and impact loads. Low rolling resistance.

Temperature resistant from -30 °C to +80 °C.

Wheels are suitable for 95016.

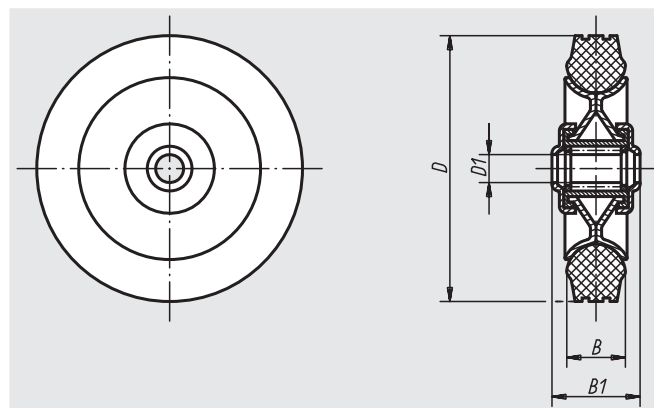

Order No.	Wheel bearing	B	B1	D	D1	Permissible load kg	Approx. weight kg
95050-08025	roller bearing	25	35	80	12	50	0,200
95050-10030	roller bearing	30	45	100	15	70	0,400
95050-12538	roller bearing	37,5	45	125	15	100	0,700
95050-14038	roller bearing	37,5	45	140	15	115	0,800
95050-16040	roller bearing	40	60	160	20	135	1,200
95050-18050	roller bearing	50	60	180	20	170	1,700
95050-20050	roller bearing	50	60	200	20	205	2,100