

Elastic solid rubber tyre


Material:

Wheel body in die cast aluminium; tyre in elastic solid rubber

Sample order:

nlm 95053-200501


Note:

The tyre is vulcanised onto the rim. Wheels with elastic solid rubber tyres have a high wear resistance, a low rolling resistance and an excellent operational comfort.

Application temperature from -30 °C to +80 °C.

Wheels are used for pallet trucks as front wheels.

Other sizes on request.

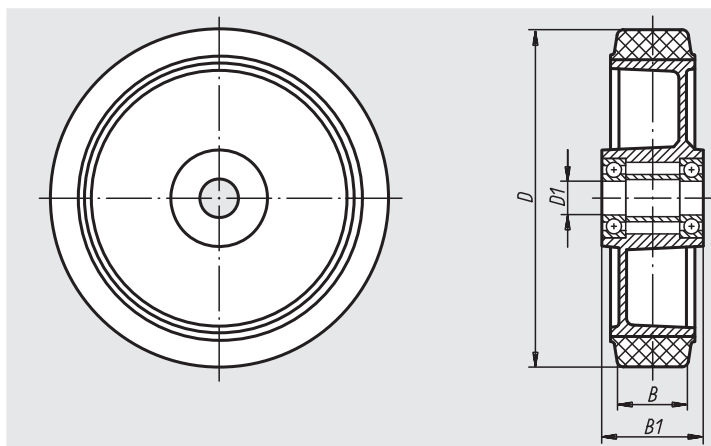

Order No.	Wheel bearing	B	B1	D	D1	Permissible load kg	Approx. weight kg
95053-200501	ball bearing	35	60	200	20	450	1,580

Nylon wheels

with injection-moulded tread


Material:

Wheel body PA; tread in thermoplastic polyurethane-elastomer

Sample order:


nlm 95056-12535

Note:

Wheels with polyurethane tread are characterised by a high load capacity, abrasion-resistance, floor-saving, shock and vibration absorption. They are robust and resistant against lots of chemicals and acids.

Temperature resistant from -30 °C to +80 °C.

Wheels are suitable for 95024.

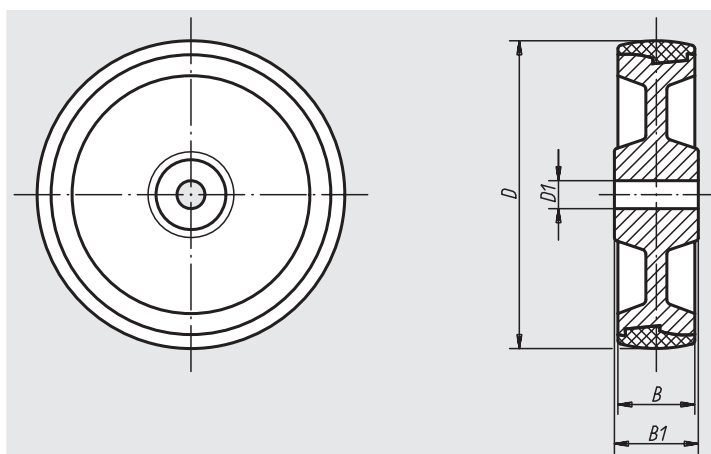

Order No.	Wheel bearing	B	B1	D	D1	Permissible load kg	Approx. weight kg
95056-10035	slide bearing	35	45	100	15	200	0,200
95056-12535	slide bearing	35	45	125	15	250	0,300
95056-15040	slide bearing	40	60	150	20	400	0,500
95056-20050	slide bearing	50	60	200	20	700	1,100