

Heavy-duty castors


Material:


Wheel body in steel tube, with ball bearing; tread in Extrathane, hardness 92° shore A.

Sample order:

nlm 95059-0857520

Note:

Optimum ball bearing protection against splash water. The tread is firmly bonded. These wheels are characterised by particularly high rebound resilience with long endurance times as well as high cut and tear propagation resistance. They are also abrasion-resistant, non-staining, floor-saving, elastic and have a low-noise rolling performance as well as a low rolling resistance. Application area: pallet trucks, forklift, etc. Other sizes on request.

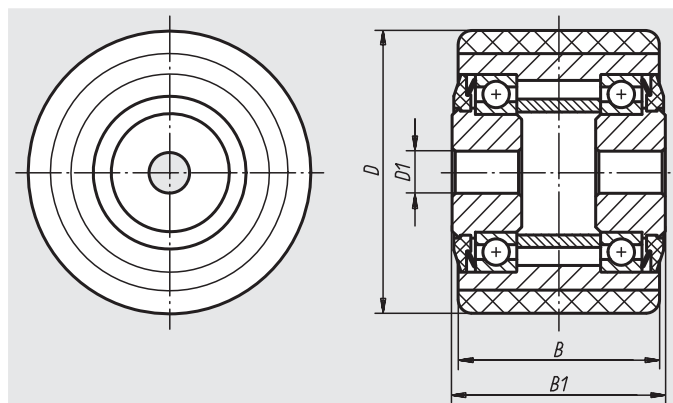

Order No.	Wheel bearing	B	B1	D	D1	Permissible load kg	Approx. weight kg
95059-0856020	ball bearing	60	65	85	20	450	1,040
95059-0856025	ball bearing	60	65	85	25	450	0,980
95059-0857520	ball bearing	75	80	85	20	570	1,300
95059-0857525	ball bearing	75	80	85	25	570	1,280
95059-0859525	ball bearing	95	100	85	25	720	1,630

Heavy-duty wheels

wheel body welded


Material:


Wheel body welded steel construction; tread in Extrathane

Sample order:

nlm 95060-16050

Note:

The tread made of Extrathane polyurethane is characterised by particularly high rebound resilience with long endurance times, low-noise rolling performance, elastic, floor-saving and abrasion-resistance. The wheel is fitted with a grease nipple for bearing maintenance. Application temperature from -40 °C to +80 °C. Wheels are suitable for 95030 and 95032.

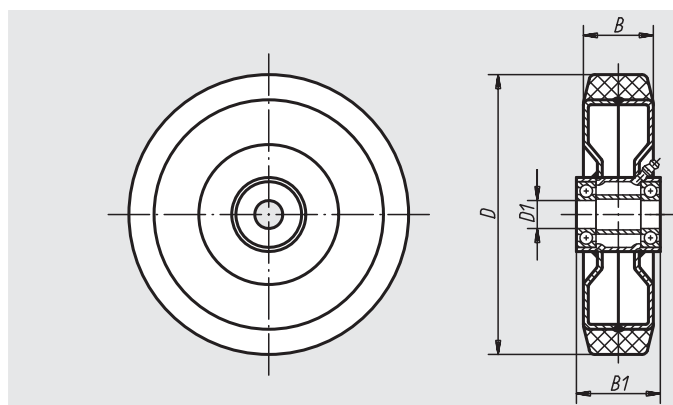

Order No.	Wheel bearing	B	B1	D	D1	Permissible load kg	Approx. weight kg
95060-12550	ball bearing	50	60	125	20	500	1,300
95060-16050	ball bearing	50	60	160	20	700	1,800
95060-20050	ball bearing	50	60	200	20	1000	2,400
95060-25060	ball bearing	60	70	250	25	1350	4,110