

Ball transfer units

with sheet steel housing



Material, surface finish:

Steel galvanized or stainless steel


Sample order:

nlm 95150-122


Note:

Ball Transfer Units with sheet steel housing are protected against dirt by a felt seal.

Surface finish B: cap and housing galvanized,
balls in steel
Surface finish C: cap and housing galvanized,
balls in stainless steel
Surface finish D: cap, housing and balls
in stainless steel

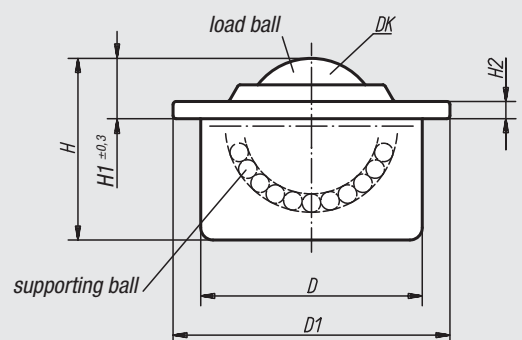

Way of installation:



Order No.	Surface finish	DK	D	D1	H	H1	H2	Base load C (N)	Approx. weight kg	Tolerance ring suitable for ball rollers
95150-115	B	15,8	24 ±0,065	31	21	9,5	2,8	600	0,043	95164-024
95150-122	B	22,2	36 ±0,080	45	30	9,8	2,8	1600	0,132	95164-036
95150-130	B	30	45 ±0,080	55	37	13,8	4	3000	0,278	95164-045
95150-145	B	44,5	62 ±0,095	75	53,5	19	4	6100	0,725	95164-062
95150-215	C	15,8	24 ±0,065	31	21	9,5	2,8	600	0,043	95164-024
95150-222	C	22,2	36 ±0,080	45	30	9,8	2,8	1600	0,132	95164-036
95150-230	C	30	45 ±0,080	55	37	13,8	4	3000	0,278	95164-045
95150-245	C	44,5	62 ±0,095	75	53,5	19	4	6100	0,725	95164-062
95150-315	D	15,8	24 ±0,065	31	21	9,5	2,8	380	0,043	95164-024
95150-322	D	22,2	36 ±0,080	45	30	9,8	2,8	1000	0,132	95164-036
95150-330	D	30	45 ±0,080	55	37	13,8	4	2000	0,278	95164-045