

Ball transfer units

with spring clip




Material, surface finish:
Steel galvanized

Sample order:
nlm 95160-122

Note:
Ball Transfer Units with spring clip for easy assembly and disassembly from the load side. Fixing is by means of spring clips, which permit generous tolerances in the mounting hole. They are protected against dirt by a felt seal.

S = Minimum nominal thickness of mounting base.

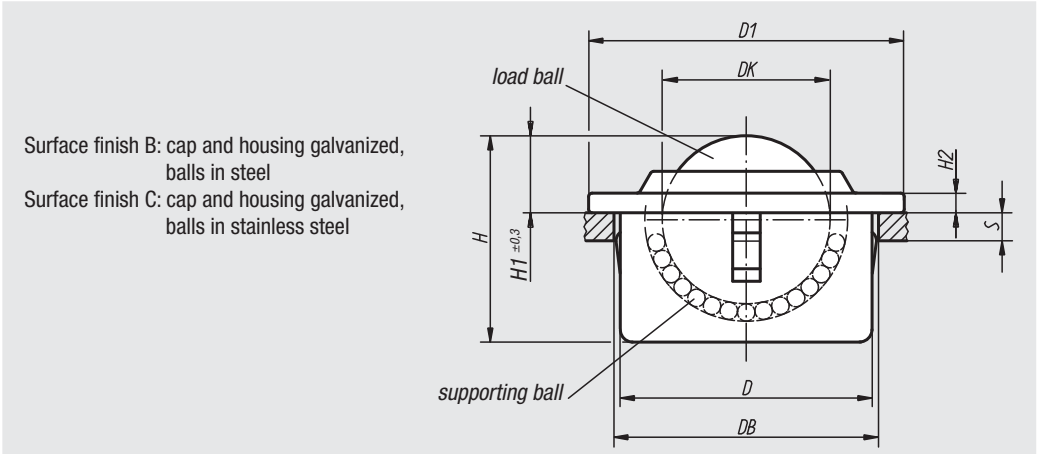

Order No.	Surface finish	DK	D	D1	Receiving-Ø DB	H	H1	H2	S	Base load C (N)	Approx. weight kg
95160-115	B	15,8	24 ±0,1	31	25 +0,5	21	9,5	2,8	2	600	0,043
95160-122	B	22,2	36 ±0,1	45	37 +0,5	30	9,8	2,8	3	1600	0,132
95160-130	B	30	45 ±0,1	55	46 +0,5	37	13,8	4	6	3000	0,278
95160-215	C	15,8	24 ±0,1	31	25 +0,5	21	9,5	2,8	2	600	0,043
95160-222	C	22,2	36 ±0,1	45	37 +0,5	30	9,8	2,8	3	1600	0,132
95160-230	C	30	45 ±0,1	55	46 +0,5	37	13,8	4	6	3000	0,278