

Cam levers with plastic handle

with internal and external thread, steel or stainless steel



Material, surface finish:


Handle and thrust washer in glass-fibre reinforced plastic PA 66, black;
hinge pin in stainless steel 1.4305, natural finish;
threaded stud and washer in steel, quality class 5.8, blue chromated or stainless steel 1.4305, natural finish

Sample order:

nIm 04232-121105X20
(please also indicate dimension L)

Note:

Plastics are characterized by creeping under load (retardation).

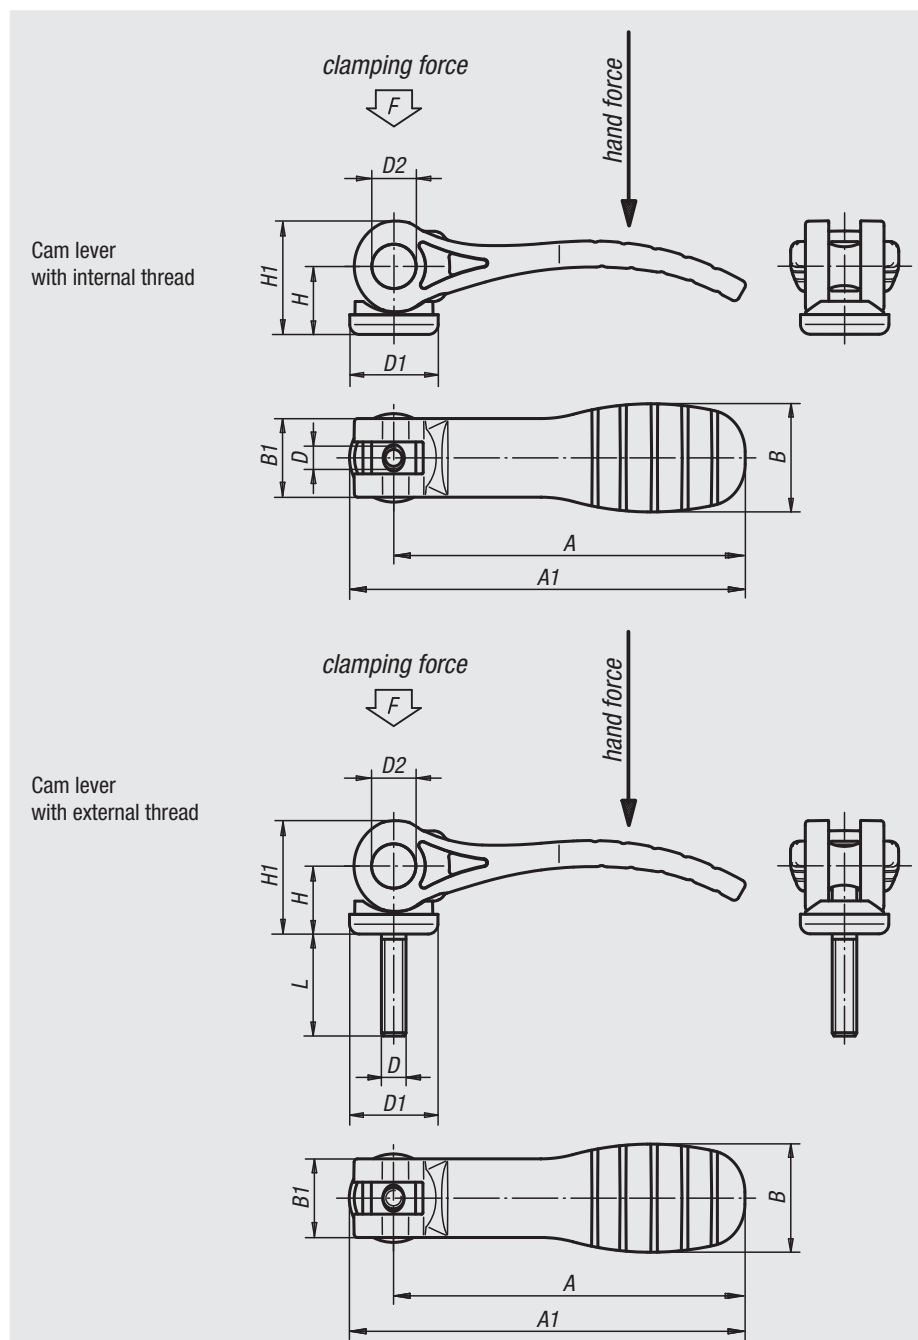

Cam levers with plastic handle and internal thread

Order No. steel	Order No. stainless steel	Size	Internal thread D	D1	D2	B	B1	H	H1	A	A1	Clamping force F (kN)	Hand force N	Stroke
04232-121105	04232-131105	1	M5	18	9	22	16	14	23,4	71,5	79,6	2,5	125	1,15
04232-121106	04232-131106	1	M6	18	9	22	16	14	23,4	71,5	79,6	2,5	125	1,15
04232-221108	04232-231108	2	M8	27	11	33	24	16,2	27,7	99,9	110	5	170	1,5

Cam levers with plastic handle and external thread

Order No. steel	Order No. stainless steel	Size	External thread D	D1	D2	B	B1	H	H1	A	A1	L = screw length	Clamping force F (kN)	Hand force N	Stroke
04232-121105X	04232-131105X	1	M5	18	9	22	16	14	23,4	71,5	79,6	20/30/40/50	2,5	125	1,15
04232-121106X	04232-131106X	1	M6	18	9	22	16	14	23,4	71,5	79,6	20/30/40/50	2,5	125	1,15
04232-221108X	04232-231108X	2	M8	27	11	33	24	16,2	27,7	99,9	110	25/30/40/50	5	170	1,5
04232-221110X	04232-231110X	2	M10	27	11	33	24	16,2	27,7	99,9	110	25/30/40/50	5	170	1,5